

REVISION
REDRAWN ON CAD

DATE
6-12-87

LAPP
INSULATOR COMPANY
LEROY, N.Y. 14486



No. F-308017 SERIES

TITLE
CLAMP TOP LINE POST

UNITS in. (mm) ORG. DATE 5-27-80 DWN. J. Bonaldi APP.

REF. 115 kV

DIMENSIONS

LEAKAGE DISTANCE, in. (mm) 71 (1803)
DRY ARCING DISTANCE, in. (mm) 27 (686)

MECHANICAL VALUES

CANTILEVER STRENGTH, lb. (kN) 2800 (12.5)


ELECTRICAL VALUES

LOW FREQUENCY DRY FLASHOVER, kV 270
LOW FREQUENCY WET FLASHOVER, kV 210
IMPULSE FLASHOVER - POSITIVE, kV 390
IMPULSE FLASHOVER - NEGATIVE, kV 570

NOTE:

ALL FERROUS PARTS ARE HOT DIP GALV. PER ASTM A153

ASSEMBLY	GLAZE COLOR
F-308017	CHOCOLATE
F-308017-70	LIGHT GRAY No.70

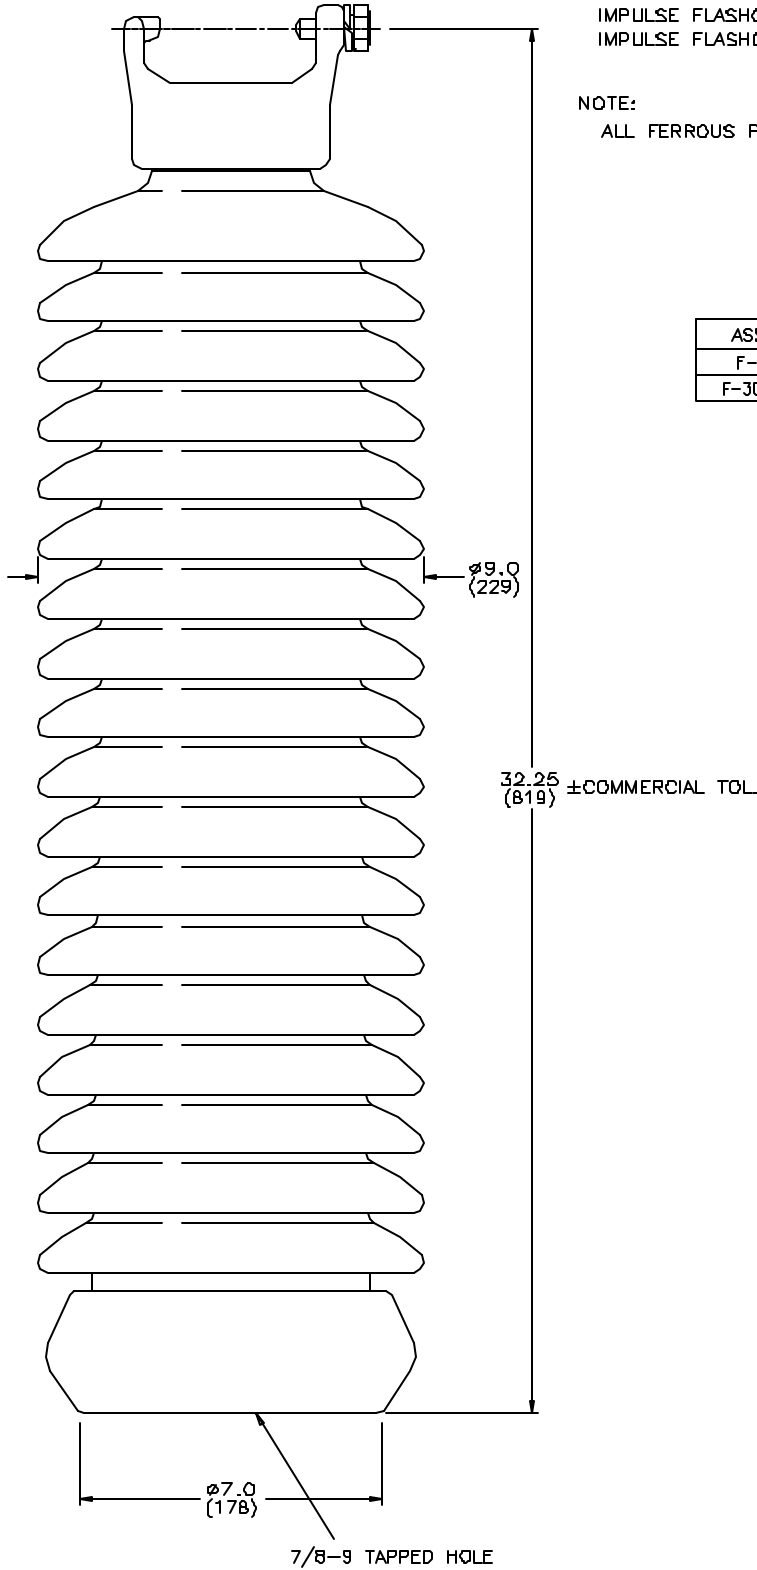

NOTE TO PURCHASER
ALL SALES OF LAPP PRODUCTS ARE
SUBJECT TO OUR STANDARD TERMS
AND CONDITIONS AND THE LIMITED
WARRANTIES THEREUNDER.