

REVISION

DATE



LAPP INSULATOR Co.
LEROY, N.Y. 14482



No. SDJ-317016 & -70

DATE 3-31-95

SCALE 1/4

TITLE SOLID PEDESTAL POST

DWN. D. Connolly


CHK.

APP.

BK.No. 84E

REF. TR16

4 TAPPED HOLES
1/2-13 +.015 OVERSIZE
.62 (16) FULL THREAD
ON 3.0 (76) BOLT CIRCLE



ELECTRICAL PATH DISTANCE

LEAKAGE DISTANCE, in. (mm) 80 (2032)

MECHANICAL VALUES

CANTILEVER STRENGTH, lbs. (kN)
 UPRIGHT 1500 (6.6)
 INVERTED 1000 (4.4)
 TENSION STRENGTH, LBS. (kN) 12000 (53.3)
 TORSION STRENGTH, IN.-LBS. (kNm) 15000 (1.7)
 COMPRESSION STRENGTH, LBS. (kN) 25000 (111.2)



ELECTRICAL VALUES

CRITICAL IMPULSE FLASHOVER, POS., KV. 390
 LOW FREQUENCY WET WITHSTAND, KV. 145
 IMPULSE WITHSTAND, KV. 350

NOTES:

1. DIMENSIONS ARE IN INCHES (MILLIMETERS)
2. ALL FERROUS PARTS ARE HOT DIP GALV. PER ASTM A153

ASSEMBLY NO.	GLAZE COLOR
J-317016	CHOCOLATE
J-317016-70	LIGHT GRAY No.70

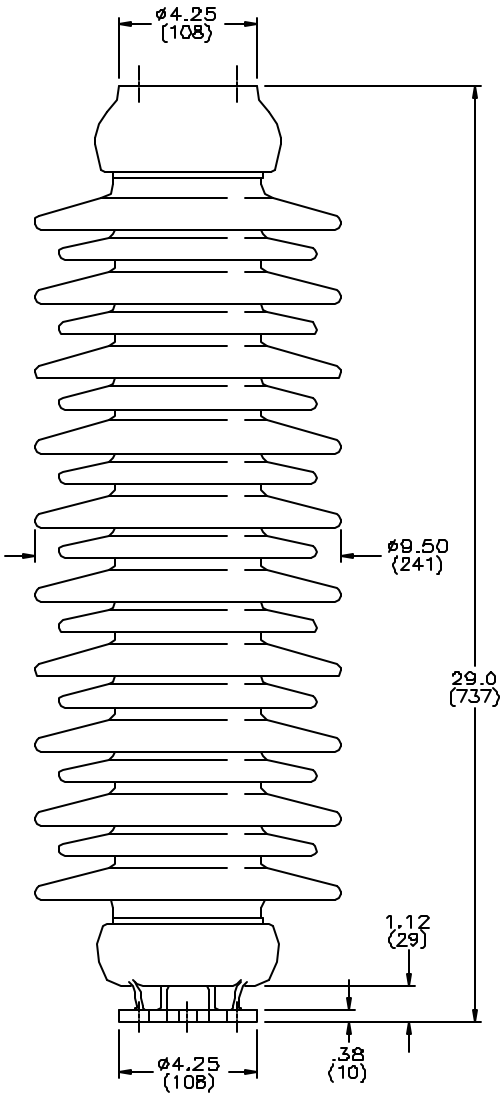

4 SLOTS
.56 (14) WIDE ON
3.0 (76) BOLT CIRCLE

NOTE TO PURCHASER
ALL SALES OF LAPP PRODUCTS ARE
SUBJECT TO OUR STANDARD TERMS
AND CONDITIONS AND THE LIMITED
WARRANTIES THEREUNDER.