

REVISION

DATE



LAPP INSULATOR Co.  
LEROY, N.Y. 14482



No. SDJ-317056 & -70

DATE 3-31-95

SCALE 1/4

TITLE SOLID PEDESTAL POST

DWN. D. Connolly


CHK.

APP.

BK.No. 84F

REF. TR56

4 TAPPED HOLES  
5/8-11 +.015 OVERSIZE  
.75 (19) FULL THREAD  
ON 5.0 (127) BOLT CIRCLE



ELECTRICAL PATH DISTANCE

LEAKAGE DISTANCE, in. (mm) 70 (1778)

MECHANICAL VALUES

CANTILEVER STRENGTH, lbs. (kN)  
UPRIGHT 3000 (13.3)  
INVERTED 2350 (10.4)  
TENSION STRENGTH, LBS. (kN) 20000 (88.9)  
TORSION STRENGTH, IN.-LBS. (kNm) 40000 (4.5)  
COMPRESSION STRENGTH, LBS. (kN) 60000 (266.9)



ELECTRICAL VALUES

CRITICAL IMPULSE FLASHOVER, POS., KV. 410  
LOW FREQUENCY WET WITHSTAND, KV. 160  
IMPULSE WITHSTAND, KV. 350

NOTES:

1. DIMENSIONS ARE IN INCHES (MILLIMETERS)
2. ALL FERROUS PARTS ARE HOT DIP GALV. PER ASTM A153

ASSEMBLY NO.	GLAZE COLOR
J-317056	CHOCOLATE
J-317056-70	LIGHT GRAY No.70

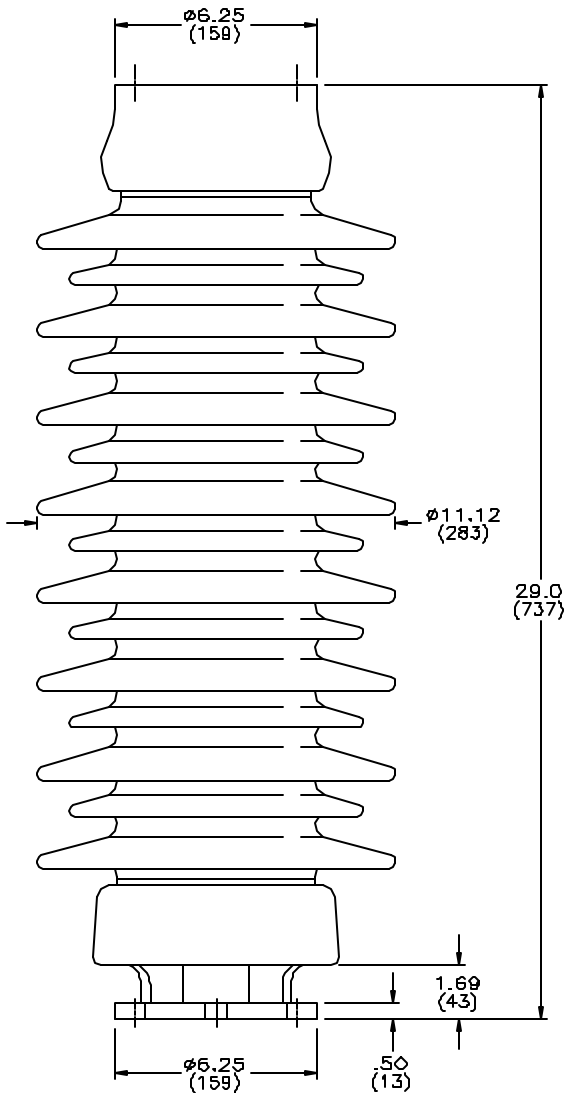

4 SLOTS  
.69 (17) WIDE ON  
5.0 (127) BOLT CIRCLE

NOTE TO PURCHASER  
ALL SALES OF LAPP PRODUCTS ARE  
SUBJECT TO OUR STANDARD TERMS  
AND CONDITIONS AND THE LIMITED  
WARRANTIES THEREUNDER.